

Pivot sliding door fitting Häfele Slido F-Park72 30F



- > Straightforward installation thanks to a high degree of pre-assembly
- > Very good running properties and low operating forces
- > Can be used with standard concealed hinges for full overlay mounting with an opening angle of 86-96°




- > For door material: Wood
- > For door weight: ≤30 kg
- > For door height: 1600–2800 mm
- > For door width: 400–700 mm
- > For cabinet depth: 550–1000 mm
- > For door thickness: 18–25 mm
- > Running gear version: 2 rollers
- > Running gear guided by: Ball bearing
- > Version: With soft closing mechanism when pulled into the pocket, left hand and right hand sets available

Note
Drilling templates and further details can be found in the fitting instructions.



D	Cabinet depth	550–1000 mm
D1	Total depth (depth outer wall)	–
DW	Door width	400–700 mm
G	Door overlay	$G = (DW - D) + 188.5 \text{ mm}$
H	Total height (height outer wall)	–
H1	Door height	1600–2800 mm
H2	Cabinet height	–
O	Gap at top	–
T	Door thickness	18–25 mm

Pivot Sliding Doors


9

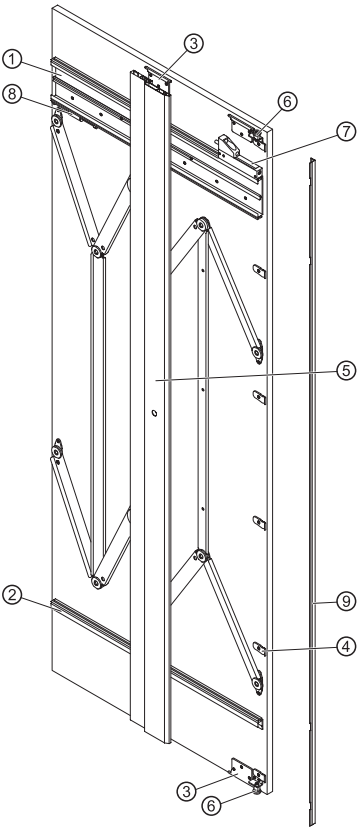

- ① = Top running track
- ② = Bottom running track
- ③ = Fixing clips for connector profiles
- ④ = Fixing clips for front cover profile
- ⑤ = Pivot sliding mechanism
- ⑥ = Door runner
- ⑦ = Front magnetic stopper
- ⑧ = Stopper with rear soft and self closing mechanism
- ⑨ = Front cover profile

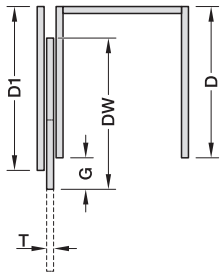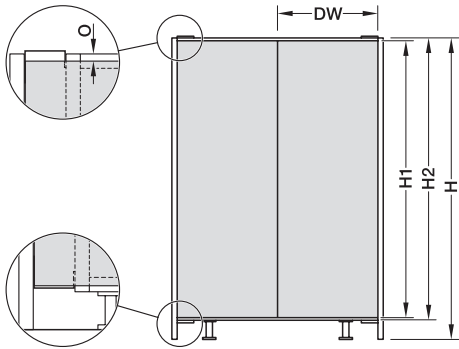


Overlay door, flush with cabinet at bottom

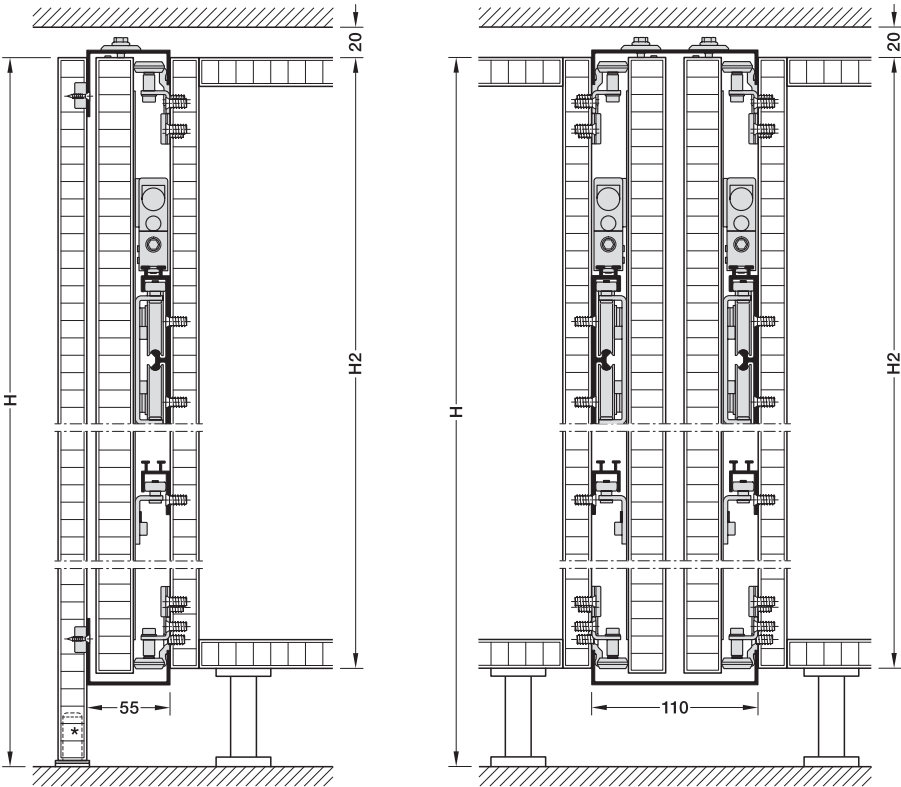

* Include adjusting foot


Overlay door, covering the plinth,
Height outer wall (H) = Cabinet height (H2)

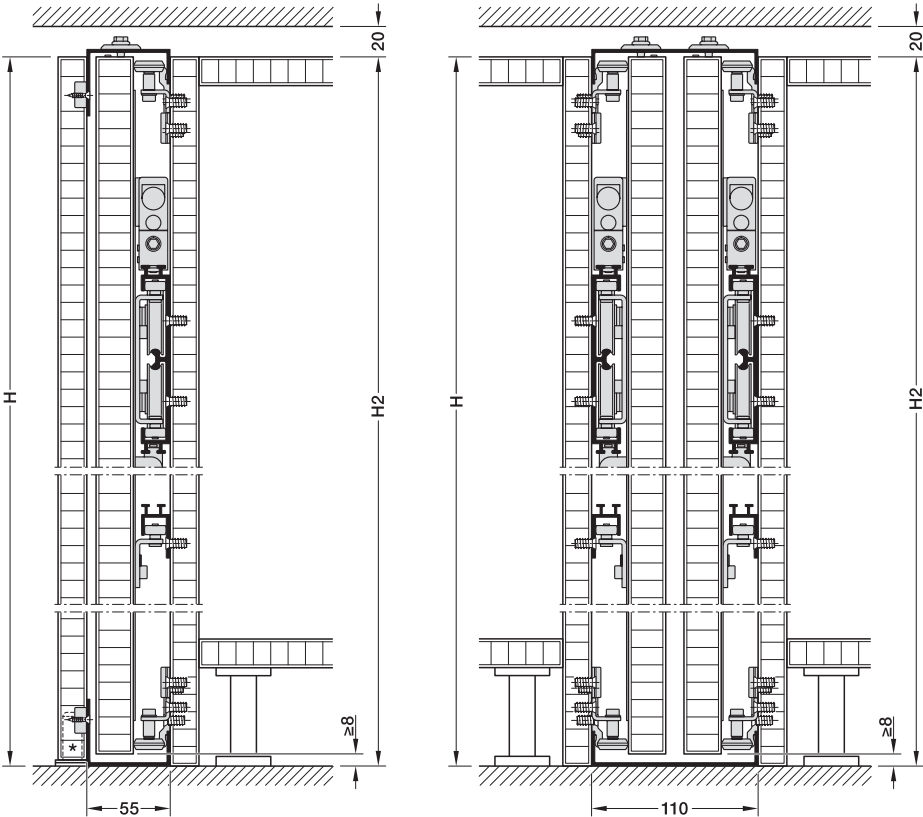

* Include adjusting foot

DGH-M-INT 2020, HDE-en, 05/19; Dimensional data not binding. We reserve the right to alter specifications without notice.

Door inset

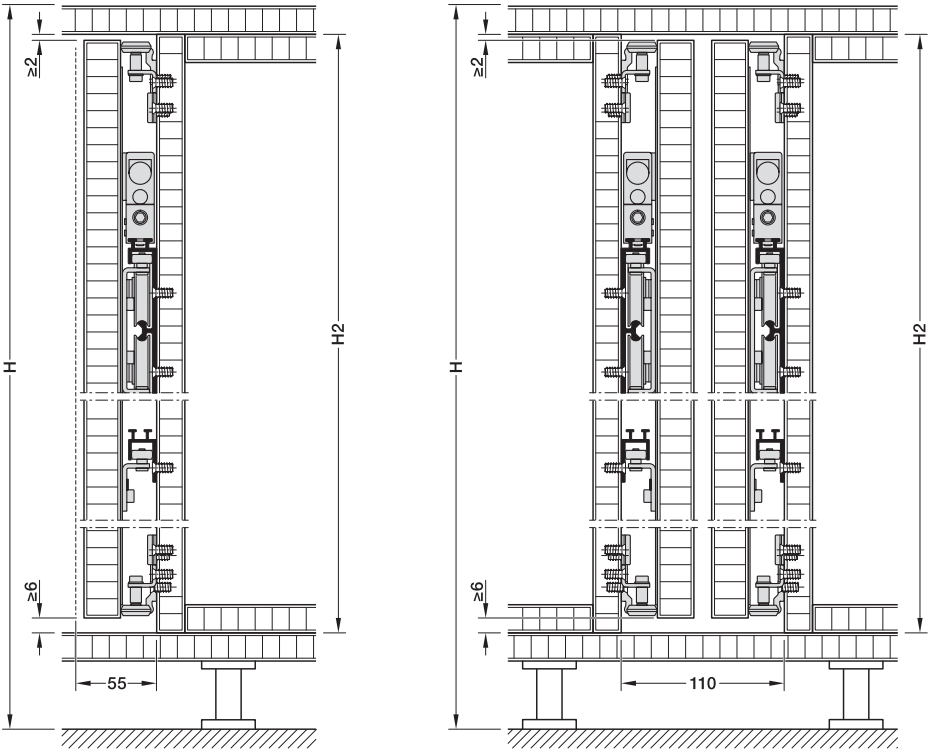

Note: With inset application eliminates the door guide on front edge. Connecting profiles cannot be used.

→ Set for 1 door

For door height mm	Supplied with	Mounting	Cat. No.
1600–2000	1 Running track, top 1 Running track, bottom	Left	408.45.028
		Right	408.45.029
2001–2400	1 Pivot sliding mechanism 2 Door leaf runners, top and bottom	Left	408.45.030
		Right	408.45.031
2401–2800	1 Magnet stopper, front 1 Stopper with soft and self closing mechanism, rear 1 Front panel cover profile incl. fixing clips 1 Fixing set	Left	408.45.032
		Right	408.45.033

Packing: 1 Set

Order reference

The concealed hinges required for the full overlay mounting standard application must be ordered separately.
We recommend using the Häfele Metalla 510 A/SM 110° concealed hinge for standard applications in combination with the opening angle limiter 329.24.500.

→ Connecting profile set

For parking pocket

		Supplied with	Mounting	Cat. No.
Parking pocket for 1 door leaf, top and bottom		2 Connecting profiles 55 mm, bottom and top 1 Guide profile, top 4 Fixing clips	Left	408.45.401
			Right	408.45.402
Parking pocket for 2 door leaf, top and bottom		2 Connecting profiles 110 mm, bottom and top 2 Guide profiles, top 8 Fixing clips	–	408.45.403

Packing: 1 Set

❗ Concealed hinges	► FF 4.2
❗ Straightening fittings	► FF 9.122
❗ Plinth adjuster	► FF 11.177